

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Tala

Supplier's address: Tala Engineering Team, 25b Vyner Street, E2 9DG London London, UK

Model identifier: MUSE-A60-6W-2000-2800K-E27-MP-12V-02

Type of light source:

| | | | |
|---|------|---------------------------------|------|
| Lighting technology used: | LED | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | E27 | | |
| Mains or non-mains: | NMLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | No | | |
| Anti-glare shield: | No | Dimmable: | Yes |


Product parameters

| Parameter | Value | Parameter | Value |
|--|----------------------|--|------------------------|
| General product parameters: | | | |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer | 6 | Energy efficiency class | G |
| Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 400 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2000...2800 |
| On-mode power (P_{on}), expressed in W | 6,0 | Standby power (P_{sb}), expressed in W and rounded to the second decimal | 0,00 |
| Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal | - | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set | 95 |
| Outer dimensions without separate control gear, lighting control | Height | Spectral power distribution in the range 250 nm to 800 nm, at full-load | See image in last page |
| | Width | | |
| | Depth | | |


| | | | | |
|---|------|------------------------------------|----------------|--|
| parts and non-lighting control parts, if any (millimetre) | | | | |
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - | |
| | | Chromaticity coordinates (x and y) | 0,433 0,405 | |
| Parameters for LED and OLED light sources: | | | | |
| R9 colour rendering index value | 80 | Survival factor | 1,00 | |
| the lumen maintenance factor | 0,90 | | | |

(a) : not applicable;

(b) : not applicable;

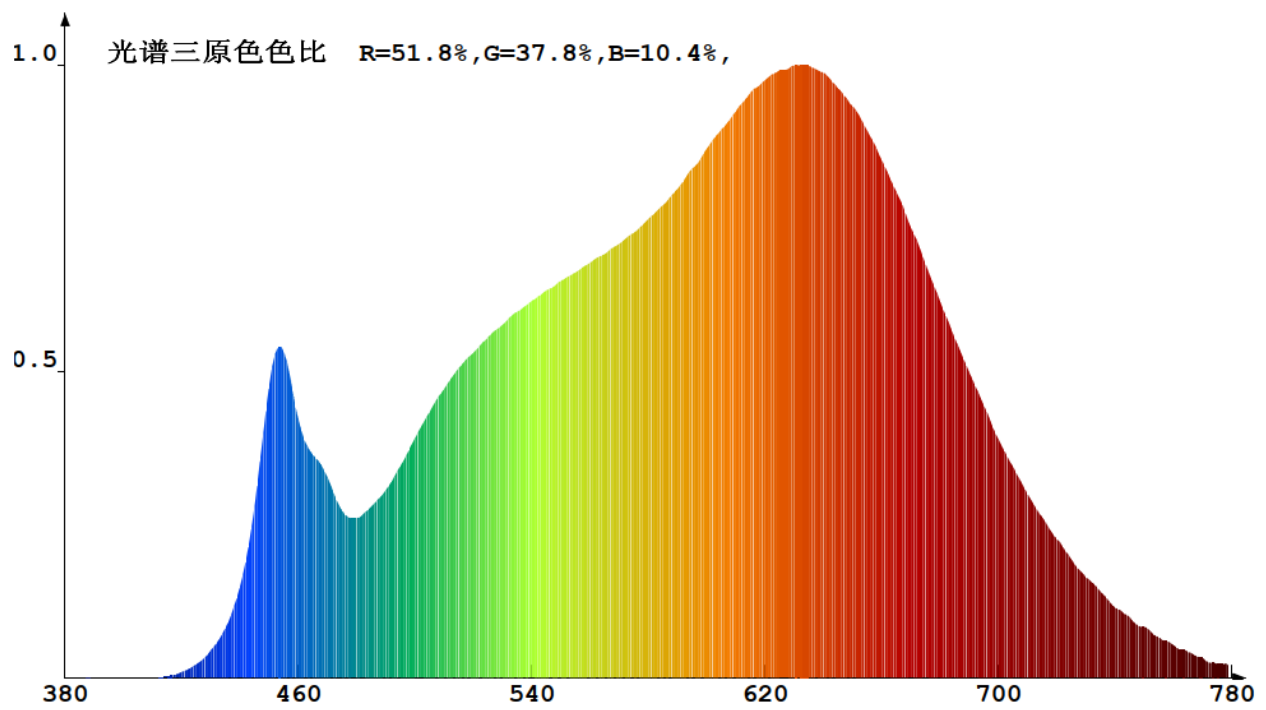

Model placed on the Union market from 07/02/2025



EPREL registration number: 2258702

<https://eprel.ec.europa.eu/qr/2258702>

Supplier: Tala Europe B.V. (Manufacturer)

Website: eu.tala.co.uk

Customer care service:

Name: Tala Engineering Team

Website: www.tala.co.uk

Email: engineering@tala.co.uk

Phone: +44 2031501058

Address:

25b Vyner Street
E2 9DG London
United Kingdom