

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: FERMOB

Supplier's address: SERVICE RELATION CLIENT, PARC ACTIVAL, 01140 THOISSEY, FR

Model identifier: 3304-INOUI-TABOURET LUMINEUX H.44 CM

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Diffuseur polyéthylène		
Mains or non-mains:	NMLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Yes

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	250 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000 or 6 000
On-mode power (P_{on}), expressed in W	4,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,00	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without	Height	420	Spectral power distribution in the See image in last page
	Width	420	
	Depth	440	

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)		range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,441
Parameters for LED and OLED light sources:			
R9 colour rendering index value	11	Survival factor	1,00
the lumen maintenance factor	1,00		

(a): not applicable;

(b): not applicable;

Attachment No. 1: Photometric test record of one lamp at initial measurement
For Model No.: H44(3000K)

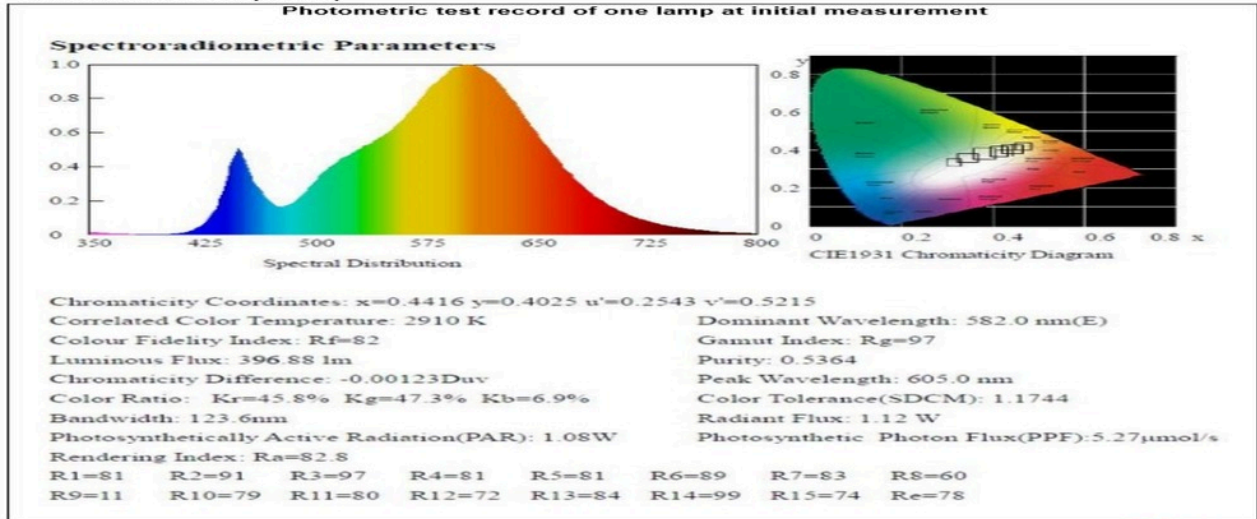

Attachment No. 1: Photometric test record of one lamp at initial measurement
For Model No.: H44(6500K)

